



## Next Gen LED Lit Video Wall



### 80" SXGA+ LED Lit Rear Access Video wall

- SXGA + Resolution
- Long Life & Green Product
- High Brightness LED Series
- Browser/Server Based Architecture



# Next Gen LED Lit Video Wall Series

Delta's Next GEN LED-Lit Series is a rear projection, LED-Lit SXGA+ Video wall that offers high brightness, high reliability and long lifetime for 24x7 operations. LED illumination offers you an array of performance enhancements – both in image quality and cost of ownership.

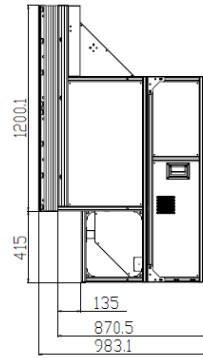

## Specifications

<b>Model</b>	<b>DVS-8070R9</b>		
Description	LED Light Source SXGA+ Cube		
Individual Cube Size	80" with Image Area : 1600 x 1200 mm		
Display Technology	DLP, single chip		
Native Resolution	SXGA+, 1400 x 1050		
Aspect Ratio	4:3		
Brightness	Up to 1200 Lumens		
Brightness Uniformity	Up to 96%		
Screen Type	XPS / CSI / Delta Selected / Others		
Screen to Screen Gap	Adjustable up to 0.2 mm		
Adjuster Mechanism	Manual Six-axis Mechanism		
Color	Typ. 16.7 million		
Light Source	3x 6 Fold LED ( RGB)		
Estimated Lamp Life	Eco Mode : 80,000 hours		
	Typ. Mode : 60,000 hours		
Color Stability	Self calibrating with color sensor		
Dynamic Contrast Ratio	1,500,000:1		
Standard Inputs	1x Digital DVI-I, 1x HDMI, 1x Analog D-sub 15pin, 1x Analog 5BNC (RGBHV or YPbPr)		
Standard Outputs	1x Digital DVI-D		
Optional Board	I*	Inputs	1x Digital DVI-D, 1x HDMI, 1x Display port, 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video
	II*	Inputs	1x Digital DVI-D, 1x 3G-SDI, 1x Display port 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video
		Output	1x 3G-SDI
III*	Inputs	1x Digital DVI-D, 1x HD-baseT, 1x Display port 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video	
Control	1x RS-232, 1x RS 422 RJ45, 1x IR Receiver, 1x Ethernet		
Cube Control	IP based Monitoring & Control		
AC Input Voltage	AC 90-240 V @ 50/60 Hz		
Power Consumption	Max : 270 W / Typ. : 240 W / Eco : 205 W		
Power Supply	Redundant Dual power supply available as an option		
Operating Temperature	10-40°C;		
Non-Operating Temperature	-20 -60 °C;		
Humidity	10-90%, non-condensing		

※ All specifications are subject to change without prior notice. Ver:08.2016  
Note: \* Only one of the optional boards can be used with standard input / output board.