

LED Display Controller


DC-300

- Supports multiple input resolutions : 1280×1024 · 1020×1200 · 1920×712
- USB Port for easy access to software control
- DVI / External audio input
- Rear viewable power and signal indicators
- 2 serial ports (UART OUT\UART IN) for cascading by USB cable
- Non-Rack mountable Unit



DC-300

LED controller Sending unit is the next step from our base sending unit. It is a single space rack mount unit , which offers two or four CAT 5 outputs. Allowing for more redundancy and security. This unit can be accessed using a PC laptop and Delta control software.

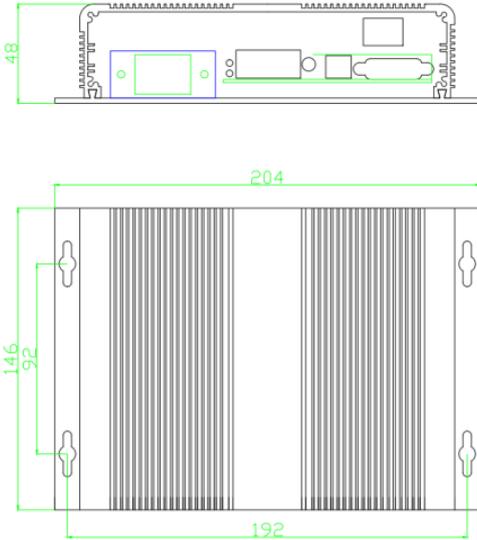

Specifications

Product Name	DC- 300
Control port	USB
Video Input	DVI
Signal Output	RJ45
Resolution	1.3million pixels
Maximum width output	1920 pixels
Maximum height output	1200 pixels
Power Input (AC)	AC 100 ~ 240V
Dimension (L x H x D)	204 x 48 x 145 mm
Weight	1.75 Kg
Audio Input	Yes
Operation Voltage	4.7~6V
Operation Current	0.45~0.7A
Operation Temperature	-20~75°C
Operation Humidity	0%-95%
Storage Temperature	-20~75°C
Storage Humidity	0%-95%
USB Cable	1.5M
DVI Cable	1.5M