



# Laser Video Wall



## 70" Full HD Laser Lit Rear Access Video Wall

- Rich picture quality with Full HD Resolution for superb image quality
- Ultra High Brightness to give the most vivid colors
- High lumens efficiency for reducing operating costs
- Browser/Server based architecture for quick monitoring



# 70" Full HD Laser Lit Rear Access Video Wall

Delta's Laser Video wall is a rear projection, Laser based Full HD Video wall that offers environment friendly Laser illumination, ultra high brightness and true cube redundancy. Industry's first ultra-bright Laser based DLP® video wall improves energy savings of up to 33%.

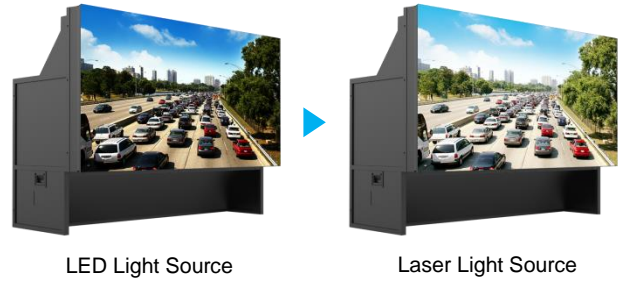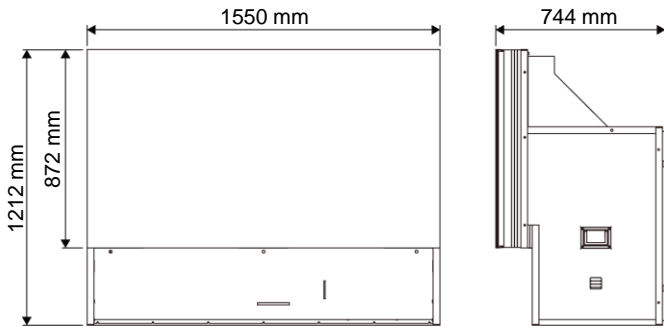

## Specifications

<b>Model</b>	<b>DVS-708R AN</b>					
Description	Laser Light Source Full HD Cube					
Individual Cube Size	70" Diagonal					
Image Size	1550 x 872 mm					
Display Technology	DLP, single chip					
Native Resolution	1920 x 1080 pixels					
Aspect Ratio	16:9					
Screen to Screen Gap	Adjustable up to 0.2 mm					
Light Source	Laser					
Brightness	Typ. 2400 lumens <sup>*1</sup>					
Brightness Uniformity	Up to 98% <sup>*2</sup>					
Contrast Ratio	Typ. 1800:1					
Colors	16.7 million					
Color Temperature Range	3200K to 9300K, Custom					
Standard Inputs	1x Digital DVI-I, 1x Digital HDMI, 1x Analog D-sub 15pin, 1x Analog 5BNC (RGBHV or YPbPr)					
Standard Outputs	1x Digital DVI-D					
Optional Board	I <sup>*3</sup>	Inputs	1x Digital DVI-D, 1x HDMI, 1x Display port, 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video			
	II <sup>*3</sup>	Inputs	1x Digital DVI-D, 1x 3G-SDI, 1x Display port, 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video			
		Output	1x 3G-SDI			
III <sup>*3</sup>	Inputs	1x Digital DVI-D, 1x HD-baseT, 1x Display port, 1x Analog 5BNC (RGBHV or YPbPr), 1x Analog S-video				
Control Options	RS-232 / RS 422, IP, IR					
Screen Brightness	Screen Type	Bright mode	Normal mode	ECO mode	Screen Viewing Angle ( 1/2 Gain )	
	CSI	586 cd/m <sup>2</sup>	440 cd/m <sup>2</sup>	318 cd/m <sup>2</sup>	H: 36°	V: 34°
	XMD-AG	628 cd/m <sup>2</sup>	470 cd/m <sup>2</sup>	340 cd/m <sup>2</sup>	H: 31°	V: 17°
Light source Average Life	60,000 hours	80,000 hours	100,000 hours			
Power Consumption	320 w	250 w	160 w			
Input Voltage	AC 90-240 V @ 50/60 hz					
Power Supply	Dual Power supply available as an option					
Dimension (W x H x D) & Weight	Dimension : 1550 x 1212 x 744 mm, Net Weight : 121Kg					
Operating Temperature	5°C ~ 40°C (41°F ~ 104°F), Operating Altitude : <=4000m					
Non-Operating Temperature	-20°C ~ 60°C (-4°F ~ 140°F)					
Operating / Storage Humidity	10% ~ 90%, non-condensing					

Note: \*1. Bright mode Engine brightness, \*2. Through electrical compensation, \*3 Only one of the optional boards can be used with standard input / output board.

※ All specifications are subject to change without prior notice.

Ver:07.2017

Website: [www.deltadisplays.com](http://www.deltadisplays.com) | Contact Us: [vw.sales@deltadisplays.com](mailto:vw.sales@deltadisplays.com)

